

Replacing Graphic Panels

STEP

1




Remove Existing Graphic Panels

Loosen, but do not remove, all 8 Phillips Flat Head screws on the Top Plate of the Edge Tower (approximately four rotations should suffice).

Using a Flat Head screwdriver, carefully wedge tip of screwdriver between the top of the panel and the Top Plate, then nudge panel away from Top Plate until you can gently grab the top of the panel. Then, holding the top of the panel, carefully pull the panel out of the channel on the right extrusion, and then out of the channel on the left extrusion.

Repeat to remove second panel.

Tighten all 8 Phillips Flat Head Screws on the Top Plate of the Edge Tower.

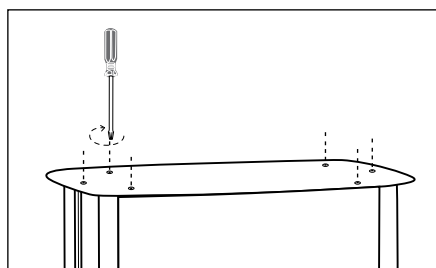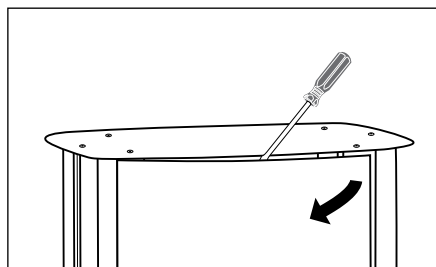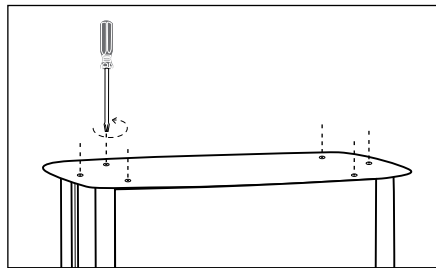

STEP

2

Install New Graphic Panels

Prepare new panels for use by peeling away any protective film.

Holding Graphic Panel on the sides, gently feed left side of panel into the channel on left extrusion.

Make sure panel is securely inserted into left channel, then gently bend the right side of the panel in towards the right-center of the Edge Tower.

Guide the right side of panel into the channel on the right extrusion, by pushing down on the edge of panel along the side until panel snaps into place. Begin at the top and making your way down the panel.

Repeat for the second panel.

